

Xiangwei Zhang¹,
Lili Huang²,
Guoqun Zhao³

1 – School of Management, Shandong University, Jinan, Shandong, China

2 – Institute of Engineering Mechanics, Shandong Jianzhu University, Jinan, Shandong, China

3 – Engineering Research Center for Mould & Die Technologies, Shandong University, Jinan, Shandong, China

A DENSITY CONTROL BASED ADAPTIVE HEXAHEDRAL MESH GENERATION ALGORITHM

Сянвей Чжан¹,
Лілі Хуан²,
Гоцюнь Чжао³

1 – Факультет менеджменту, Шаньдунський університет, Цзинань, Шаньдун, Китай

2 – Інститут інженерної механіки, Шаньдунський Цзяньчжу університет, Цзинань, Шаньдун, Китай

3 – Центр інженерних досліджень для ливарних та металооброблюючих технологій, Шаньдунський університет, Цзинань, Шаньдун, Китай

КОНТРОЛЬ ЩІЛЬНОСТІ НА ОСНОВІ АДАПТИВНОГО АЛГОРИТМУ ПОБУДОВИ ШЕСТИГРАННОЇ СІТКИ

Purpose. The quality of the finite element mesh is one of the important factors which determine the precision and accuracy of finite element analysis. A density control based adaptive hexahedral mesh generation algorithm for three dimensional models is presented in this paper.

Methodology. The main idea of the adaptive grid-based mesh generation algorithm is similar to those of other conventional grid-based methods, but the initial grid structure is generated adaptively based on the geometric features of the solid model.

Findings. The density control based hexahedral mesh generation algorithm can accurately capture the geometric features of the solid model with the least number of elements and can generate high quality of hexahedral element meshes.

Originality. A spatial refinement field is constructed in this paper to control the mesh size and density distribution based on the geometric factors of the solid model.

Practical value. Conformal hexahedral element meshes which can capture all the geometry characters of the solid models and meet finite element analysis are generated. The effectiveness of the algorithm and quality of the mesh generation are demonstrated by using a mechanical model.

Keywords: *improved grid-based method, geometric features, hexahedral mesh generation, conformal refinement, 27-refinement templates, mesh quality*

Introduction. With the development of computer technology and numerical method, numerical simulation methods play more and more important roles in the fields of science research and engineering applications. Mesh generation is the key technique in the pre-processing part of numerical analysis software, and its task is to discretize the solid model into a ‘mesh’ composed of a number of elements. The efficiency and accuracy of numerical analysis and the reliability of software computation are strongly dependent on the density and quality of mesh model. In three-dimensional numerical analysis, tetrahedron, hexahedron and a combination of them are usually used. Tetrahedral element meshes have the advantage of high efficiency, they are easy to implement, flexible for adaptive mesh generation and easy to realize the mesh regeneration. At present, the automatic generation technology of tetrahedral element meshes is fully mature, and it is employed extensively to handle complex geometries. However, hexahedral element meshes have been

proved to be superior to tetrahedron element meshes in terms of analysis accuracy, amount of meshes, distortion resistance and regeneration times. This turns hexahedra an attractive choice for the numerical analysis of three-dimensional problems.

Due to its own characteristics of finite element mesh, the quality of deformed mesh has a great effect on the accuracy of numerical analysis. A sound mesh generation is necessary and can significantly improve the accuracy and efficiency of the analysis. Up to now, many research studies have been done in developing the automatic hexahedral mesh generation algorithms [1–3]. There are mainly four typical approaches proposed for all-hexahedral mesh generation, including mapping/sweeping method [4], plastering method [5], whisker-weaving method [6] and the grid-based method [7]. The grid-based method is relatively simple to implement and easy to realize the local refinement. Recently, with the development of the adaptive techniques of mesh generation, the grid-based method has been modified by many researchers and used widely in the mesh. Unfortunately, there are no demonstrated

methods for creating grid-based, good-quality, reasonably density distributed hexahedral meshes.

Aiming at solving the problems of local refinement and mesh quality, this paper proposed an adaptive generation algorithm of the initial hexahedral element mesh based on the density control. The procedures of the adaptive hexahedral mesh generation algorithm are given.

Improved grid-based hexahedral mesh generation algorithm. The authors of this paper proposed an improved grid-based method for generating all hexahedral element mesh in the domain of a three-dimensional solid model [8]. Fig. 1 shows the flow chart of adaptive generation for hexahedral mesh. Detailed explanations of the key techniques shown in the flow chart will be systematically presented in the following sections.

Solid model construction and boundary identification. A solid model which can define its geometric features is constructed firstly. In this paper, triangulated boundary representations generated by CAD systems, as stereo lithography (STL) files, for example, are used. The content of STL files is the data information of a series of triangle patches that approach the surfaces of three-dimensional solid model. Fig. 2 shows the procedure of the adaptive hexahedral element mesh generation of a mechanical CAD model. Fig. 2, *a* is the triangulation of a mechanical CAD model generated by UGIV.

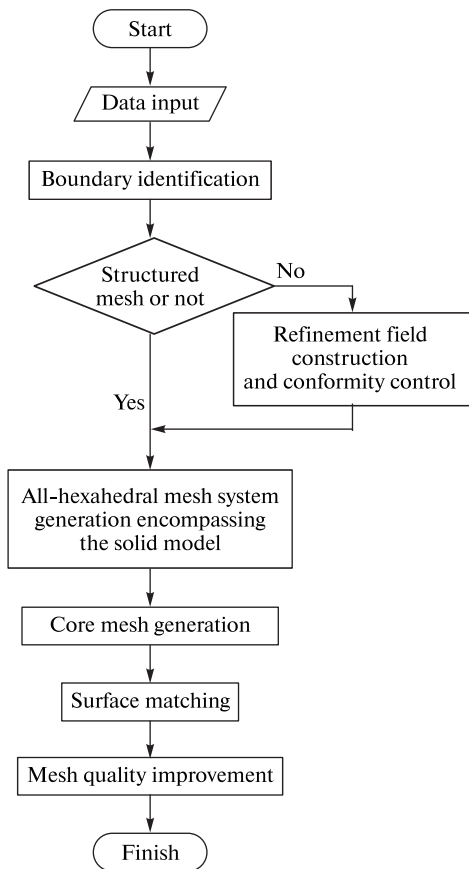


Fig. 1. Flow chart of adaptive hexahedral mesh generation

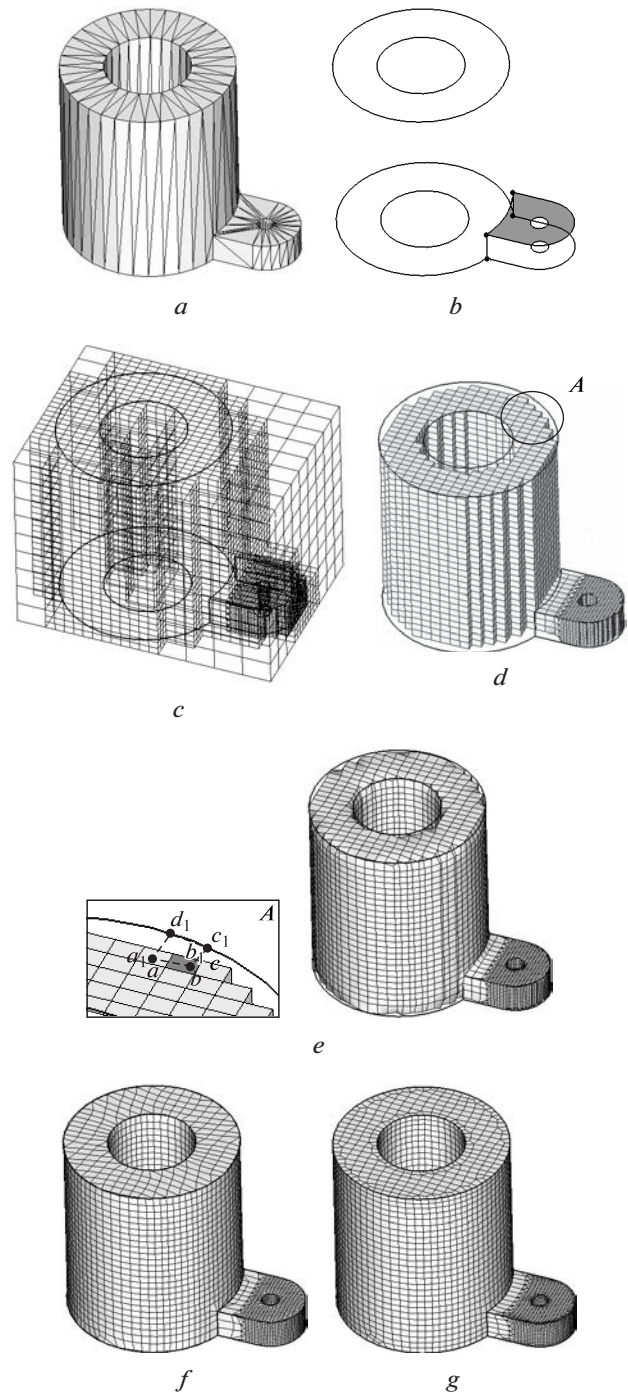


Fig. 2. Adaptive initial hexahedral element mesh generation of a mechanical CAD model: *a* – triangulated solid model; *b* – boundary identification; *c* – the refined grid structure; *d* – the core mesh; *e* – the matched mesh; *f* – the filled and matched mesh; *g* – the final generated mesh

The characteristic boundary of the solid model is identified through calculating the curvature of the triangle facets in the STL files. Firstly, the coplanar relationship among all the triangle facets is constructed through calculating the angle between the normal vectors of the triangle facet and those of the three other edge-adjacent triangle facets. All the triangle facets which are coplanar form a face named as SF. Then, the

characteristic edge is identified by judging the attribute of three edges of all the triangle facets in each face. If an edge is not shared by two adjacent triangle facets in the same face, it is defined as a characteristic edge (CL), otherwise it is a usual edge. Thirdly, the characteristic node (CV) is identified based on the rule that the node, which is connected to three or more than three CL is a characteristic node. As shown in Fig. 2, *b*, the circle nodes represent the characteristic node (CV), the thick real line is the characteristic edge (CL), and the shadowed face represents the surface of the analysed solid model (SF).

Constructing refinement field and generating the refined grid structure. In order to accurately capture the surface features of the geometries, a curvature-based criterion is usually used. Firstly, refinement source points are added on the triangle facets where the directions of the adjacent facet's normal change. If the normal of either of two of the edge-adjacent triangle facets makes an angle of more than a given value ε , these two triangle facets are considered as a curve surface and source points are added on them. ε is a user-specified parameter to detect geometrical features and is assigned as 5° in this paper. If the sharing edge is an internal edge and its end vertices are not on the boundary, the source points will be added on two end vertices. If the sharing edge is internal and its two end vertices are on the boundary, source points will be added on the sharing edge. The number of the source points on the sharing edge can be calculated by dividing the length of the sharing edge by the length of the shortest edge among all the edges of the two adjacent triangles. Then, element refinement fields are constructed according to the source point fields. If an element contains more than one source points, it will be marked as an element to be refined.

To ensure the accuracy of numerical calculation, the thickness-based criterion needs to be used. This paper supposes that there are at least three layer elements in each direction of the meshed model. From the point of topology, the above supposition can simply state that every straddling element must have no less than one vertex-adjacent interior element. Otherwise, it is marked as an element to be refined.

The first step for the initial refined grid structure generation is to generate a cubic grid structure enveloping the solid model. Then each cub is subdivided according to the conformal refinement templates in Fig. 3 until curvature-based and thickness-based criterion stated above are satisfied. That is, there is not any element to be refined in the refinement field. The hypercriticism of the refinement criteria is unnecessary when the model is complex, because it will decrease the computation efficiency. As an addition, a convergence criterion of the repetition based on the ratio of the number of the refinement elements in the element refinement fields to the total number of elements is employed. If the ratio is less than a valve value α , the repetition is stopped. α is usually assigned from 0 to 0.1 and is assigned as 0.001 in this paper. To avoid creating low quality elements, transition elements are not re-

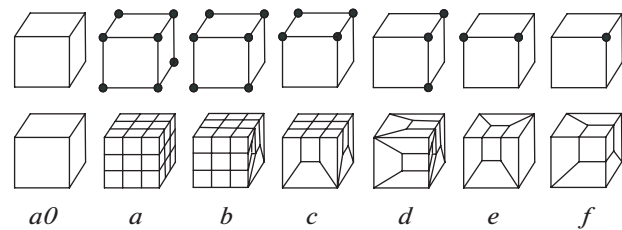


Fig. 3. 27-refinement templates proposed by authors [8]:

a0 – zero-refinement; *a* – all-refinement; *b* – two edge-sharing face-refinement; *c* – face-refinement; *d* – two node-sharing edge-refinement; *e* – edge-refinement; *f* – node-refinement

efined when the refinement step is more than one. Fig. 2, *c* shows the initially refined grid structure which completely encompasses the solid model.

Generating the core mesh. A uniformly sized or a locally refined hexahedral mesh system, which completely encompasses the solid model, is generated according to the geometries of the solid model. Usually, there is a relatively large distance between the surface of the grid structure and the surface of the solid model due to the complexity of the geometry of the model. By removing all the elements in the exterior of the solid model, a jagged core mesh which is well-shaped and near the solid boundary is generated. Fig. 2, *d* shows the jagged core mesh through eliminating the elements out of the solid model.

Matching the core mesh to the solid model. The surface of core mesh should be matched to the surface of the solid model. Firstly, the surfaces of the core mesh which can be considered as a polyhedron of quadrilateral faces are picked up and the normal vectors of the whole nodes on surfaces are calculated. Then, the corresponding mesh points of the nodes on the surface of the core mesh are generated as the intersection points of the normal vectors with the model surface. Finally, the hexahedral elements in the surface-gap are constructed by connecting all the nodes of the core mesh surface with their corresponding intersection nodes as the unit of a quadrilateral facet. As shown in Fig. 2, *d*, the obtained corresponding points of point *a*, *b*, *c* and *d* are a_1 , b_1 , c_1 and d_1 respectively. The generated hexahedral element in the surface-gap is $a-b-c-d-a_1-b_1-c_1-d_1$. Fig. 2, *e* shows the resulting mesh after matching the surface of core mesh to the surface of the solid model.

From Fig. 2, *e* we can see that all the surface nodes of the mesh are on the surfaces of the solid model. It can also be seen that the CLs of the solid model are still not described well by the filled mesh. Fig. 2, *f* shows the mesh after finishing the surface filling and boundary matching.

Improving the mesh quality. The mesh quality is of vital importance for finite element automatic generation. Mesh quality improvement involves two main approaches, which are employed together in this paper. One is a smoothing operation and the other is a topological operation. Here the smoothing operation selects

the scaled Jacobian and the condition number of the Jacobian matrix as the metrics to measure the mesh quality. It is assumed that the element is untangled, i.e. the scaled Jacobian value of a hexahedron must be positive. The condition number is defined as $\kappa(T) = |T| |T^{-1}|$, where T is the Jacobian matrix. An algebraic shape metric for a hexahedron is defined as $f = 8 / \sum_k (\kappa(T_k) / 3)$

with $k = 1, \dots, 8$. The full range of a hexahedron condition number value is from 0 to +1. The hexahedron whose condition number value is greater than about 0.2 represents a geometrically well-shaped element and satisfies the need of finite element analysis. When the condition number of a hexahedron is between 0.5 and 1, it is considered as a very excellent resulting mesh.

By combining the Laplacian smoothing method with the optimization approach which chooses the mesh quality metric as the objective function, the mesh quality is improved significantly. Although after matching of all the nodes, smoothing techniques are conducted to improve the mesh quality, there are still severely distorted elements. This owns to the generations of some elements with poor quality in the geometrical topology, such as some elements sharing a CL with other elements and some elements with three nodes of a free facet fixed on a same CL . The quality of such elements is possibly out of the acceptable range of finite element analysis and cannot be improved with any node position smoothing. They are judged as degenerate elements. Because all the invalid elements exist on the CL of the solid model, the insertion technique and the collapsing technique are applied to the boundary elements according to their sharing CL of the solid model. The final mesh is obtained, as shown in Fig. 2, g. Fig. 4 shows the quality of the resulting mesh after optimization. The ratio of the elements whose Condition Number is between 1 and 2 is 95.63 %.

Discussion on the algorithm. The main idea of the improved grid-based mesh generation algorithm is similar to those of other conventional grid-based methods, but the initial grid structure is generated adaptively based on the geometric features of the solid model. As stated above, the first step of this algorithm is to import the solid model which needs to be meshed and

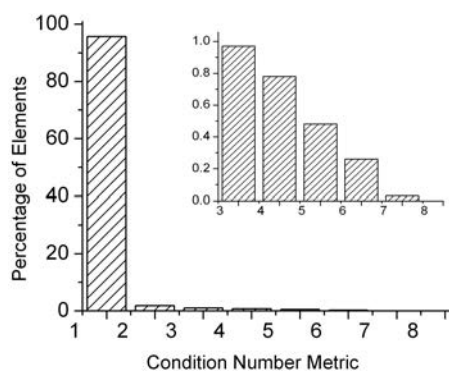


Fig. 4. The quality of mesh in Fig. 2, g with Condition Number metric

then identify the characteristic boundary of the solid model. Secondly, the refinement fields are constructed and modified according to the conformal refinement templates, and used as a metric to generate an initial grid structure which is completely superposed on the solid model. Thirdly, a jagged core mesh is generated by removing all the elements in the exterior of the solid model. Fourthly, all of the surface nodes of the jagged core mesh are matching to the surfaces of the model through a node projection process, and a hexahedral element mesh model with the boundaries matched to the solid model are generated. Finally, the mesh quality such as topology and shape is improved by using corresponding optimization techniques.

These steps are all taken automatically except the import process in the first step. Many studies have shown that the time expensed on the mesh generation usually takes up 80 % of the time for the whole process of finite element analysis. So it is necessary to find out the time-consuming reason and the distribution of the required time for different mesh generation steps. In this paper, the time of the mesh generation was calculated on a Microsoft Windows XP PC with an Intel Pentium 3.00 GHz processor and 1.5 GB RAM. Fig. 5 shows the ratio of the computation time in different steps of the mesh generation to the total computation time of the hexahedral element mesh generation for the solid model in Fig. 2. In the figure, the abscissa represents the steps of the mesh generation process, where numbers 1–5 represent the serial number from the first step to the fifth step, respectively. The ordinate indicates the time ratio. It can be seen from Fig. 5, the time ratios for the first step and the third step are relatively small. The expensed time of the second step is the longest. The sum of the time of the fourth step and the fifth step is more than a half of the total computation time.

Conclusion. This paper presented a density control based algorithm for local refinement of hexahedral meshes by using the 27-refinement method. The mesh quality is improved significantly by combining the Laplacian smoothing method with the optimization approach which chooses the mesh quality metric as the objective function. The efficiency and robustness of the algorithm were verified by the resulting meshes.

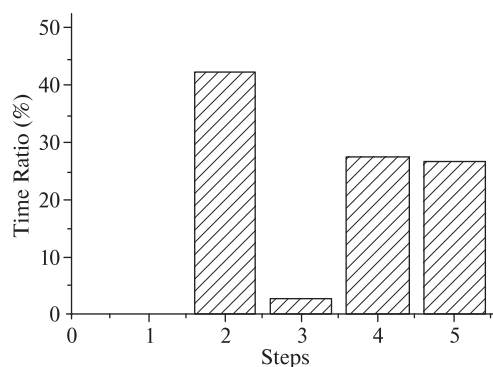


Fig. 5. Ratios of computation time in mesh generation steps to the total computation time for the solid model in Fig. 2

The density control based hexahedral mesh generation algorithm improves the control ability of the element refinement and can generate the hexahedral meshes suitable for finite element analysis of three dimensional engineering problems.

Acknowledgements. This work was supported by Foundation for Outstanding Young Scientist in Shandong Province (BS2013ZZ015) and National Natural Science Foundation of China (50875155).

References / Список літератури

1. Hu, K. and Zhang, Y. J., 2016. Centroidal voronoi tessellation based polycube construction for adaptive all-hexahedral mesh generation. *Computer Methods in Applied Mechanics & Engineering*, Vol. 305, pp. 405–421.
2. Kawaharada, H., Imai, Y. and Hiraoka, H., 2014. Quadrilateral meshing for hexahedral mesh generation based on facet normal matching (special issue on cad, cam, and digital engineering). *International Journal of Automation Technology*, Vol. 8, pp. 356–364.
3. Tarjuelo-Gutierrez, J., Rodriguez-Vila, B., Pierce, D. M., Fastl, T. E., Verbrugge, P., Fourneau, I., Maleux, G., Herijgers, P., Holzapfel, G. A. And Gomez, E. J., 2014. High-quality conforming hexahedral meshes of patient-specific abdominal aortic aneurysms including their intraluminal thrombi. *Medical & Biological Engineering*, Vol. 52, No. 2, pp. 159–68.
4. Sorger, C., Frischmann, F., Kollmannsberger, S. and Rank, E., 2014. Tum.geoframe: automated high-order hexahedral mesh generation for shell-like structures. *Engineering with Computers*, Vol. 30, No. 1, pp. 41–56.
5. Silva Filho, J. B. M., Tsuzuki, M. S. G., Ueda, E. K. and Martins, T. C., 2014. Mesh generation for surfaces with distinct boundary segmentation. In: the Federal University of Rio Grande do Sul, *12th IEEE International Conference on Industrial Informatics*. Porto Alegre, RS, Brazil, 27–30 July 2014.
6. Kawamura, Y., Islam, M. S. and Sumi, Y., 2008. A strategy of automatic hexahedral mesh generation by using an improved whisker-weaving method with a surface mesh modification procedure. *Engineering with Computers*, Vol. 24, No. 3, pp. 215–229.
7. Bols, J., Taelman, L., De, S. G., Degroote, J., Verheghe, B., Segers, P. and Vierendeels, J., 2016. Unstructured hexahedral mesh generation of complex vascular trees using a multi-block grid-based approach. *Computer Methods in Biomechanics & Biomedical Engineering*, Vol. 19, No. 6, pp. 663–672.
8. Huang, L., Zhao, G., Ma, X. and Wang, Z., 2013. Incorporating improved refinement techniques for a grid-based geometrically-adaptive hexahedral mesh generation algorithm. *Advances in Engineering Software*, Vol. 64, No. 1, pp. 20–32.
9. Knupp, P. M., 2000. Achieving finite element mesh quality via optimization of the jacobian matrix norm and associated quantities. Part I – A framework for surface mesh optimization. *International Journal for Numerical Methods in Engineering*, Vol. 48, No. 3, pp. 401–420.

Мета. Якість сітки кінцевих елементів є одним із важливих факторів, що визначають точність аналізу кінцевих елементів. У цій роботі представлено метод контролю щільності, заснований на адаптивному алгоритмі генерації шестигранною сітки для тримірних моделей.

Методика. Основна ідея адаптивного алгоритму формування регулярної сітки аналогічна іншим сітковим методам, але вихідна структура сітки конструюється адаптивно на основі геометричних характеристик твердотільної моделі.

Результати. Контроль щільності на основі алгоритму генерації шестигранною сітки дозволяє точно фіксувати геометричні особливості твердотільної моделі з найменшим числом елементів і може генерувати високу якість сіток з шестиграними елементами.

Наукова новизна. У роботі будується поле просторового перестроювання, щоб контролювати розмір сітки та розподіл щільності на основі геометричних факторів твердотільної моделі.

Практична значимість. Генеруються сітки з рівнокутними шестиграними елементами, що можуть охопити всі геометричні примітиви твердотільних моделей і задовільняють аналізу методом кінцевих елементів. Ефективність алгоритму та якість побудови сіток продемонстровані з використанням механічної моделі.

Ключові слова: удосконалений сітковий метод, геометричні особливості, побудова шестигранної сітки, конформне перестроювання, шаблони „перестроювання на 27 осередків“, якість сітки

Цель. Качество сетки конечных элементов является одним из важных факторов, определяющих точность анализа конечных элементов. В этой работе представлен метод контроля плотности, основанный на адаптивном алгоритме генерации шестигранной сетки для трехмерных моделей.

Методика. Основная идея адаптивного алгоритма формирования регулярной сетки аналогична другим сеточным методам, но исходная структура сетки конструируется адаптивно на основе геометрических характеристик твердотельной модели.

Результаты. Контроль плотности на основе алгоритма генерации шестигранной сетки позволяет точно фиксировать геометрические особенности твердотельной модели с наименьшим числом элементов и может генерировать высокое качество сеток с шестигранными элементами.

Научная новизна. В работе строится поле пространственного перестроения, чтобы контролировать размер сетки и распределение плотности на основе геометрических факторов твердотельной модели.

Практическая значимость. Генерируются сетки с равноугольными шестигранными элементами, которые могут охватить все геометрические примитивы твердотельных моделей и удовлетворяют анализу методом конечных элементов. Эф-

фективность алгоритма и качество построения сеток продемонстрированы с использованием механической модели.

Ключевые слова: усовершенствованный сеточный метод, геометрические особенности, построение шестигранной сетки, конформное

перестроение, шаблоны „перестроения на 27 ячеек“, качество сетки

Рекомендовано до публікації докт. техн. наук В. В. Гнатушенком. Дата надходження рукопису 27.09.15.

UDC 004.023

**T. A. Zheldak, Cand. Sc. (Tech.), Assoc. Prof.,
V. V. Slesarev, Dr. Sc. (Tech.), Prof.,
I. G. Gulina, PhD**

State Higher Educational Institution “National Mining University”, Dnipro, Ukraine, e-mail: elita3@rambler.ru

THE ALGORITHM OF ARTIFICIAL IMMUNE SYSTEM SIMULATION WITH SAATY SELECTION OPERATOR AND ONE-DIMENSIONAL LOCAL SEARCH

**Т. А. Желдак, канд. техн. наук, доц.,
В. В. Слесарев, д-р техн. наук, проф.,
І. Г. Гуліна, PhD**

Державний ВНЗ „Національний гірничий університет“, м. Дніпро, Україна, e-mail: elita3@rambler.ru

АЛГОРИТМ МОДЕЛЮВАННЯ ШТУЧНОЇ ІМУННОЇ СИСТЕМИ З СЕЛЕКТИВНИМ ОПЕРАТОРОМ СААТІ ТА ОДНОВИМІРНИМ ЛОКАЛЬНИМ ПОШУКОМ

Purpose. Development of an algorithm which implements a certain method of modelling an artificial immune system for solving the task of multidimensional constrained optimization of multiextremum continuous functions and which provides increasing performance indicators.

Methodology. A hybrid adaptive immune algorithm is proposed. It uses an operator of clonal selection based on the evaluation of fitness of solutions using the method of Saaty’s hierarchy; pair adaptive crossover; the adaptive mutation based on polynomial and normal distribution laws; limited coordinate wise local search using the method the Golden section.

Findings. The use of the algorithm for multidimensional constrained optimization that simulates the behavior of the artificial immune system as the operator of selection is mathematically justified by the operator based on the method of analysis of Saaty’s hierarchies. It is proposed for the first time. Unlike any of known implementations of heuristic operators, it ensures a high precision and speed of the ascent up to the same level of problems.

Originality. The results show high efficiency of the proposed algorithm for optimization of standard objective functions used as a test on the spacial dimensions up to 100 iterations. The algorithm shows stable convergence and a higher speed when there is a task of training neural networks of direct distribution.

Practical value. The main advantages of the proposed algorithm lie in the fact that it remains effective with the growth of the of the problem; it finds not one solution, but many of them (alternatives); use much less time for a comparable solution. These properties allow the application of the proposed algorithm to solve multi-criteria multi-factor optimization problems of decision making in the processes of complex systems control.

Keywords: *immune system, optimization, Saaty’s method, local search*

Introduction. A lot of engineering, social and economic problems can be formulated as problems of optimization some objective functions which include many variables. However, in most cases there appears to be multimodal objective functions. The existence of multiple local optimums of the objective function in the same time with one or more global optimums is traditionally seen as a significant drawback. There are a number of methods and algorithmic techniques aimed at the withdrawal of the local optimums to achieve a single global solution.

The problem is compounded when the issue is not about one, but about a number of criteria and a set of decisions which are not dominated by each other among which we still trying to find a single optimum. In real usage there is often the need to find not a single optimum solution for the problem, but their families. Each of the resulting solutions that, in general is suboptimal, allows us to consider several possible outcomes.

Problem definition. Metaheuristic, known as a method of simulation of the artificial immune system, provides this multivarious problem solution.

The immune algorithm (IA) offered here imitates properties of the natural immune system. It is based on