

RATIONAL WATER CONSUMPTION UNDER MULTISTAGE WASHING

A. B. Shandyba, PhD,
D. N. Shpetny
 Sumy National Agrarian University

This report deals with a theoretical approach to the multistage washing system for dispersive materials in soil. At the present time there is growing scientific concern about the multistage washing system which provides important benefits compared to single-stage of the soil washing. Considering the effect of differential intensity of mass-transfer as the specific function of technological parameters on every stage gives some information to get a minimum water consumption. Our approach is to evaluate chemicals content changes for the last two stages with different efficiency. The cascade method utilizes the matter balance and kinetic equations under unequal efficiency and mass-transfer parameters of every stages. The optimum fresh water rate was explored under limited water consumption. It was founded that the more effective stage demands more share of water rate according to mass-transfer intensity parameters.

Keywords: washing system, dispersive materials, mass-transfer, matter balance, water consumption, pollution chemicals content.

1. INTRODUCTION

The multistage washing with differential distribution of water rate on the stages is an efficient system for water-saving. The typical example of this process refers to washing of dispersive materials in

soil. The cascade method developed in some works [1-3] utilizes the matter balance and kinetic equations under unequal efficiency and mass-transfer parameters of every stages (Figure 1).

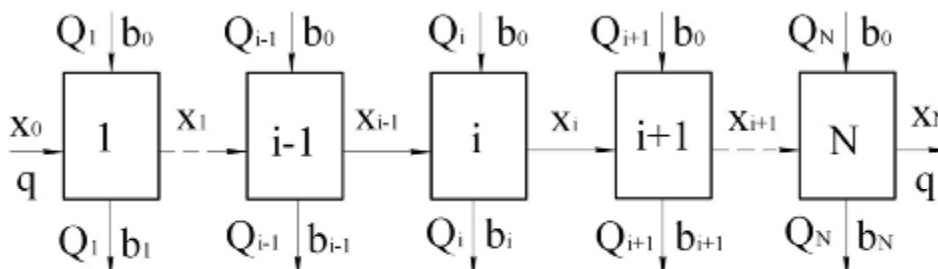


Figure 1. Schema of multistage washing with differential water distribution on stages

2. WASHING WITH DIFFERENTIAL WATER DISTRIBUTION ON STAGES

Assuming that contaminated stagnate zones volume are identical $q_i \neq idem$ on the every stage but the mass-transfer Fourier numbers are unequal $Fo_i = A_i \tau_i \neq idem$ we can find the optimal water distribution for maximum efficiency [3]. In other words, it is aimed to define the fresh water input for every

stage to deliver the minimum relation $\frac{x_N}{x_0} \Rightarrow \min$ under limited water consumption

$$\bar{Q}_N = \sum_{i=1}^N Q_i = const \quad (1)$$

and efficiency of washing process depends in a complex way on the mass-transfer parameters and water rate factors as follows:

$$E_i = \frac{C'_0 - C'_i}{C'_0 - C_0} = \frac{1 - \exp[-k_i t_i (1 + Q_i^{-1})]}{1 + Q_i^{-1}} \quad (2)$$

where C'_0, C'_i - are initial and current average concentration of dispersion material in soil;

C_0 - is the initial average concentration of dispersion material in soil;

k_i - is the volumetric coefficient of the mass-

transfer;

t_i - is the time of contact between dispersion material and water;

Q_i - is the ratio of washing water rate q_i to moisture zones rate of dispersion material q'_i

Simplifying for clean water $C_0 \ll C'_i$ gives efficiency

$$E_i = 1 - \frac{C'_i}{C'_{i-1}} \quad (3)$$

After transformation we obtain

$$C'_N = C'_0 \prod_{i=1}^N (1 - E_i) \quad (4)$$

Then the multistage washing degree takes the form

$$\bar{C}_N = \frac{C'_N}{C'_0} = \prod_{i=1}^N (1 - E_i) \quad (5)$$

For minimizing the foregoing function the Lagrange system can be utilized

$$\frac{\partial}{\partial Q_i} (\bar{C}_N + \lambda \bar{Q}_N) = 0 \quad (6)$$

where λ is the Lagrange indefinite multiplier.

This system (6) includes $N+1$ unknowns and may be solved with equation (1).

The solution of the explicit system results in the auxiliary function

$$\varphi_i = \frac{\bar{C}_N}{1 - E_i} \frac{\partial E_i}{\partial Q_i} = idem \quad (7)$$

Thus, this result points for additive information on the relationship between the technological parameters of the mass-transfer in order to reach more rational clean water use.

3. MULTISTAGE COUNTER CURRENT WASHING SYSTEM

Figure 2 shows some two-stage fragment of the counter current washing. At the present time there is growing scientific concern about the multi-stage washing system which provides important benefits compared to single-stage of the washing.

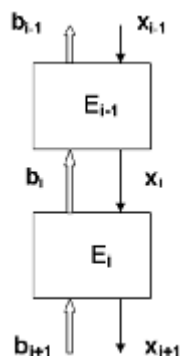


Figure 2. Two-stage fragment of the counter current gravitative washing

$$x_{i-1} = \frac{x_{i+1} - E_{i-1}b_i}{1 - E_{i-1}} = \frac{x_{i+1} - E_{i-1}b_i(1 - E_i)}{(1 - E_{i-1})(1 - E_i)} = \frac{x_{i+1} - E_{i-1}(1 - E_i)\frac{q}{Q}E_ix_i}{(1 - E_{i-1})(1 - E_i)} = \frac{x_{i+1} - E_iE_{i-1}\frac{q}{Q}x_{i+1}}{(1 - E_{i-1})(1 - E_i)} =$$

$$= x_{i+1} \frac{1 - \frac{q}{Q}E_iE_{i-1}}{(1 - E_{i-1})(1 - E_i)}$$

As a result of this procedure we can see that any approximation function of efficiency with fixing q/Q provides maximum relation $x_{i-1}/x_{i+1} \Rightarrow max$ under $E_i = E_{i+1} = idem$.

So, it is easy to apply such procedure to the following pair of stages and so on.

CONCLUSION:

In this article our aim is to evaluate chemicals content changes for the last two stages with different efficiency. The equations of the chemical content balance can be written:

$$\begin{cases} F_{i-1} = \frac{x_{i-1} - x_i}{x_i} \\ x_{i-1} = x_i(1 + F_{i-1}) \end{cases} \quad (8)$$

The chemical content of the pollutant for the next stage results in:

$$x_i = x_{i+1}(1 + F_i) \quad (9)$$

For two stages we have:

$$x_{i-1} = x_{i+1}(1 + F_i)(1 + F_{i-1}) \quad (10)$$

Taking into account eq. (9,10), chemical pollutant content into dispersive material will be evaluated as follow:

Considering the effect of differential intensity of mass-transfer as the specific function of technological parameters on every stage gives some information to get a minimum water consumption. Multistage leaching experience has the evident arguments for the possible usage of limited water rate.

References:

1. Shandyba A.B. (1995) Ecology forecast for migration of the chemical substances into ground and surface water.- Fresenius Environmental Bulletin, N 4, Basel, Switzerland, pp. 80 – 85.
2. Anna Eriksson per Johansson. (2013) Soil Washing: Optimization of Acid Leaching of Copper from Contaminated Soil Master of Science Thesis in the Master Degree Programme, - Department of Civil and Environmental Engineering, CHALMERS UNIVERSITY OF TECHNOLOGY, Gothenburg, Sweden, Report no. 2013:32
3. Shandyba A.B. (2000) Application of the Lagrange methods for optimization of interactions in aquatic systems.- Rep.37 for GREEN3 Int. Symposium "The exploitation of natural resources and the Consequences", Berlin, Germany.

Шандиба О.Б., Шпетний Д.М. Рациональное використання води при багатоступеневому промиванні

Стаття стосується теоретичного підходу до багатоступеневого промивання дисперсних матеріалів. Розглядається диференційована інтенсивність масообміну як специфічна функція технологічних параметрів кожної ступені процесу. В запропонованому підході оцінюється зміни концентраційного фону, починаючи з двох останніх ступенів каскаду. За умови обмеження обсягів води. Встановлено, що інтенсивно працююча ступінь з більш високою масообмінною характеристикою потребує більших витрат води.

Ключові слова: промивна система, дисперсні матеріали, масообмін, матеріальний баланс, витрата води, вміст забруднюючих речовин.

Шандиба О.Б., Шпетний Д.М. Рациональное использование воды при многоступенчатой промывке

Статья посвящена теоретическому подходу к многоступенчатой промывке дисперсных материалов. Рассматривается дифференцированная интенсивность массообмена как специфическая функция технологических параметров каждой ступени процесса. В предложенном подходе оценивается изменения концентрационного фона, начиная с двух последних ступеней каскада при ограничении объема воды. Установлено, что интенсивно работающая степень с большим значением массообменной характеристики нуждается в большем расходе воды.

Ключевые слова: промывная система, дисперсные материалы, массообмен, материальный баланс, расход воды, содержание загрязняющих веществ.

Стаття надійшла в редакцію: 26.03.2015р.

Рецензент: д.ф.-м..н., проф.КуземаО.С.