

UDC 656.71.06:629.7.08 (045),
DOI: 10.18372/1990-5548.52.11861

¹V. I. Chepizhenko,
²L. J. Tereshchenko

A METHOD FOR OPTICAL IMAGING OF THE THREE-DIMENSIONAL MANIFOLD STRUCTURE

¹Air Navigation Systems Department, Educational & Research Institute of Air Navigation, National Aviation University, Kyiv, Ukraine

²Aviation Radioelectronic Complexes Department, Educational & Research Institute of Air Navigation, National Aviation University, Kyiv, Ukraine
E-mails: ¹chiv@nau.edu.ua, ²10118@ukr.net

Abstract—The analytical models of optical control object's internal structure image obtaining were considered, and on their basis distortions, appearing in image depending on visualization system's parameters and emitting source type, were analyzed. The method developed for optical imaging of the inner structure of the three-dimensional manifold (hereinafter referred to as "the object monitored") allows a shadow of the three-dimensional manifold, exposed to electromagnetic radiation, to be obtained using an irradiation model.

Index Terms—X-ray; Aviation Security Service; optical imaging; shadow of the three-dimensional manifold.

I. INTRODUCTION

The method developed for optical imaging of the inner structure of the three-dimensional manifold (hereinafter referred to as "the object monitored" or OM) allows a shadow of the three-dimensional manifold, exposed to electromagnetic radiation, to be obtained using an irradiation model. It has useful applications in different life spheres, as in medicine, manufacturing industry, in a process of customs supervision of goods and means of transport for commercial use etc. It allows the Aviation Security Service (ASS) to increase the probability of correct detection of hazardous materials and reduce false responses of its security system. For medicine the method may help to increase the probability of health hazard anomaly detection.

Insights of the direct visualization methods indicate that they are inherent in the same type of operations: primary radiation exposure of the OM as three-dimensional manifolds in configuration space (in the case of active method), reradiation reception (scattered or passed through the object), its conversion into an electrical signal, signal processing and electrical-to-optical signal conversion.

II. PROBLEM STATEMENT

Modern detection systems based on X-ray, computer tomography and spectroscopy of mobile ions have certain shortcomings [1] – [5], [8], [9]. Some of these systems can detect well-hidden explosives, but their implementation requires considerable funds. In addition, they have a high level of false alarms (0.2 ... 0.4).

Thus, the development of analytical models for the receipt of multidimensional shadows of

translucent objects for further processing will allow the classification of OM, which will greatly facilitate the work of operators serving introsopes in ASS services, reducing the number of false alarms.

The simulation of the internal structure OM simple and complex forms using the point source of irradiation in the center, as well as with the bias relative to the center, is considered in the works [7]. Spectral analysis of simulated OM in works [8].

Consider visualized three-dimensional manifold irradiated by a primary radiation source. The source can be of three types: point, linear or plane (Fig. 1).

Let a point source be defined as one that produces a spherical wave front. If the point source is centered at the origin of the Cartesian coordinate system, as shown in the Fig. 1a, beams radiated from this source will come from the origin and go in every direction. A wave front in a spherical shape is shown in the Fig. 1a. A plane source of radiation is illustrated in the Fig. 1b. A front of its waves is a plane, emitted rays are parallel with each other, but normal to radiation surface and the front. The Figure 1c shows a linear source of radiation. It has a cylindrical wave front. For the linear source, specified as shown in a three dimensional coordinate system, a wave front's cross section on the plane YOZ is a circle, a wave front's cross section on the plane XOY is rectangular. Ideally the linear source of radiation is of a cylindrical shape with a diameter approaching zero and an infinite height.

III. PROBLEM SOLUTION

For mathematical description of the radiation source a model structure shown in the Fig. 2 is introduced.

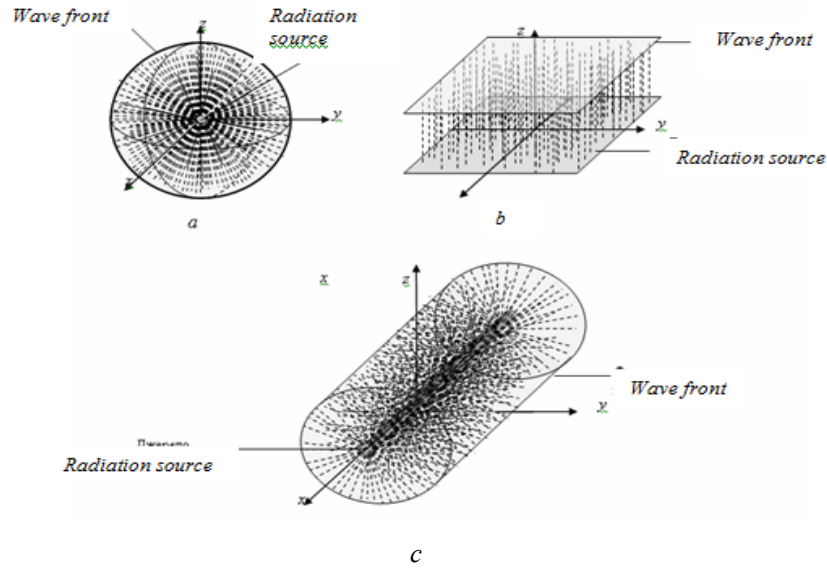


Fig. 1. Types of the primary radiation sources: (a) is a point source; (b) is a plane source; (c) is a linear source

The model of the three-dimensional manifold in configuration space involves several stages of mathematical description. Firstly the radiation source has to be described, parameters of the OM are the next.

For mathematical description of the radiation source a model structure shown in the Fig. 2 is introduced.

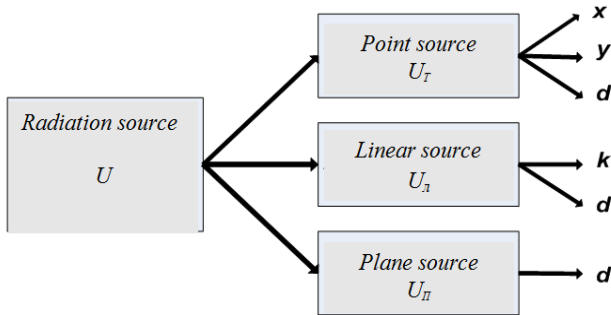


Fig. 2. A Structure of radiation source modeling

Mathematical formulation for general description of the radiation source is the following:

$$\vec{U} = (x, y, k, b_0). \tag{1}$$

For point, linear and plane sources description the following will be used:

$$U: \vec{U} = (x, y, 0, 0, b_0), \tag{2}$$

$$U: \vec{U} = (0, 0, k, b_0, d), \tag{3}$$

$$U: \vec{U} = (0, 0, 0, 0, d), \tag{4}$$

where x, y is a height of the point coordinates on a radiation plane; d is a distance to the OM; k is a

slope of the straight line, b_0 is the fixed factor of the straight line.

For mathematical description of the OM different parameters should be taken into account. Among these are a form, geometry, physical parameters, level angle relative to the plane of receivers (detectors) etc.

The object monitored is an object of regular or irregular shape. Objects of irregular shapes can be considered as a matter of combination of regular shaped objects. The parameters of the OM are introduced in the Fig. 3.

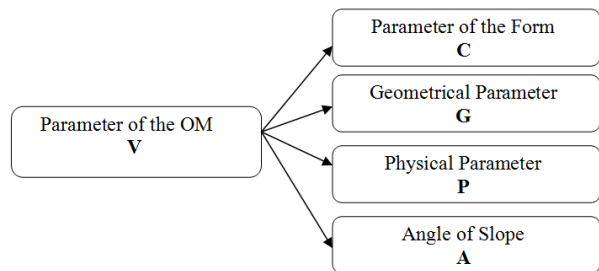


Fig. 3. A Structure of OM's parameters modeling

Mathematical description of the OM's parameters is given by expression:

$$\vec{V} = f(\vec{C}, \vec{G}, \vec{P}, \vec{A}), \tag{5}$$

where \vec{C} is the parameter of the form that determines a complexity of an object

$$\vec{C} = f(a, b), \tag{6}$$

where a , for an object of regular shape; b , for an object of irregular shape; \vec{G} is the geometrical parameter that determines measurements of OM; \vec{P}

is the physical parameter (consistence, extinction, absorption coefficient, dispersion coefficient)

$$\bar{P} = \mu\lambda, \quad (7)$$

$$\mu\lambda = \alpha\lambda + m\lambda + \pi\lambda, \quad (8)$$

where $\alpha\lambda$ is the spectral absorption coefficient; $m\lambda$ is the spectral dispersion coefficient; $\pi\lambda$ is the spectral absorption coefficient with electron-positron pairs.

$$\vec{A} = \{\alpha, \beta, \gamma\} \quad (9)$$

where $\{\alpha, \beta, \gamma\}$ are angles relative to the axes of the coordinate system x, y, z .

Therefore introscope system input receives a signal as a function $f(\vec{U}, \vec{V})$.

To determine a position of the radiation source, the OM and the screen with a point source it is appropriate to use cylindrical coordinate system applied to the Fig. 4. Internal visualization of the OM with a simple form, in this case a rectangular, designed with point source is shown in the Fig. 5.

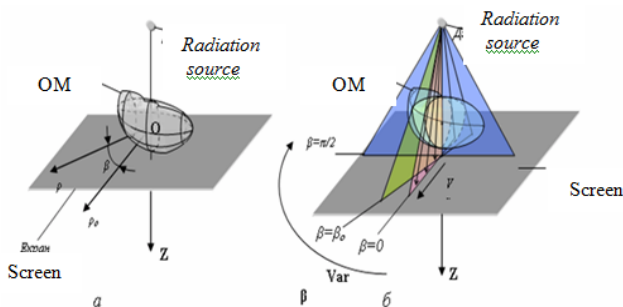


Fig. 4. Object monitored scanning: (a) is the setting a cylindrical coordinate system; (b) is the setting a scanning beam position

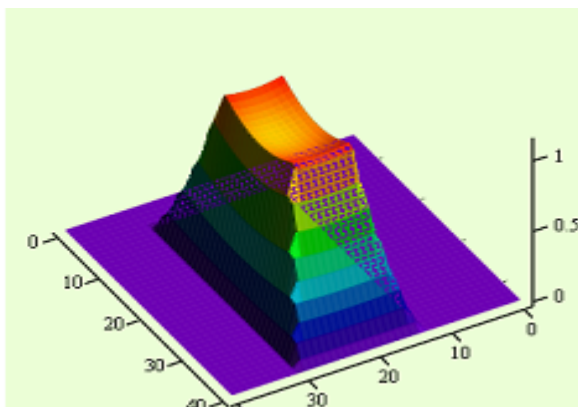


Fig. 5. Object monitored inner structure imaging

Methods of analytical modelling of the OM with different shapes, geometrical dimension, foreshortening, substance and appropriate extinction coefficients, used to develop procedures for identifying dangerous objects under security

supervision of passengers and baggage, allow to image OM inner structure.

VII. CONCLUSION

To provide aircraft tracking based on measurement data of Multilateration surveillance system the algorithm of optimal stochastic filtering was synthesized.

The algorithm presented in this article is based on the recurrent linearized Kalman filter, and it can be used for aircraft tracking in automated air traffic control systems having multiposition surveillance system MLAT.

Special attention was paid to the analytical derivation of a priori initial values of the elements of the covariance matrix in Kalman filter.

Computer simulation has demonstrated a significant performance improvement in multilateration aircraft surveillance and tracking using stochastic filtering techniques.

REFERENCES

- [1] O. O. Semenov, *Theoretical foundations and principles of construction of technical means ASS: training guide*, Kyiv, NAU, 2001, 214 p.
- [2] V. N. Epifanov, and others. *Nondestructive inspection*, in 5 books. Book 1 *General questions. Control of Propagating Substances: Practicum* / Ed. V. V. Sohorukova, Moscow, Vysshaya shkola, 1993, 350 p.
- [3] *Nondestructive inspection*, in 5 books. Book 2. *Acoustic methods of control: Practical* / Ed. V. V. Sukhorukov. Moscow, Vysshaya shkola, 1993, 380 p.
- [4] V. N. Epifanov, E. A. Gusev and others. *Nondestructive inspection*, in 5 books. Book 3. *Electrical, magnetic and eddy current testing methods and instruments: Practical* / Ed. V. V. Sukhorukov. Moscow, Vysshaya shkola, 1993, 420 p.
- [5] V. N. Epifanov, E. A. Gusev, and others. *Nondestructive inspection*, in 5 books. Book 4. *Radiation control: Practical* / Ed. V. V. Sukhorukov. Moscow, Vysshaya shkola, 1992, 321 p.
- [6] V. V. Sukhorukov, E. I. Vainberg, R. Y. J. Kazhis, A. A. Abakumov, E. A. Gusev, and others. *Nondestructive inspection* in 5 books. Book 5 *Introscopy and automation of control: Practical* / Ed. V. V. Sukhorukov. Moscow, Vysshaya shkola, 1993, 329 p.
- [7] Reliability of technology. Terms and definitions. Effective from 01.01.1996. *DSTU 2860-94*.
- [8] *X-ray technology: Directory* in 2 books. / Under V. V. Klyuyev. Moscow, 1980, book 1, 431 p., book 2, 383 p.
- [9] A. A. Semenov, and L. Y. Tereshchenko, "Modeling of the visualization of the internal structure of objects of control." *Bulletin of the Engineering Academy of Ukraine*. 2008. no.1, pp. 25–28.

Received January 20, 2017

Chepizhenko Valery. Doctor of Engineering Science. Senior researcher.

Air Navigation Systems Department, National Aviation University, Kyiv, Ukraine.

Education: Kyiv Higher Military Aviation Engineering College. Kyiv, Ukraine (1990); Admission of the Kiev Institute of the Air Force of Ukraine. (1999).

Research interests: cybernetics, avionics, information technologies and management in ergatic and technical systems, management of complex dynamical systems of conflict type.

Publications: 59.

E-mail: chiv@nau.edu.ua

Tereshchenko Lidiya. Assistant.

Aviation Radioelectronic Complexes Department, National Aviation University, Kyiv, Ukraine.

Education: Kyiv International University of Civil Aviation, Kyiv, Ukraine, (1999).

Research interests: inspection system (introsopes), image processing, projection geometry, radio electronic systems.

Publications: 7.

E-mail: 10118@ukr.net

В. І. Чепіженко, Л. Ю. Терещенко. Метод оптичного зображення внутрішньої структури тривимірного багатовиду

Розглянуто аналітичні моделі отримання оптичного зображення внутрішньої структури об'єктів контролю та на їх основі проаналізовано спотворення, які набувають зображення в залежності від параметрів системи візуалізації та типу джерел випромінювання. Метод, розроблений для оптичного зображення внутрішньої структури тривимірного багатовиду (далі «контрольований об'єкт»), дозволяє отримати тіні тривимірного багатовиду.

Ключевые слова: рентген; служба авіаційної безпеки; оптичне зображення; тінь тривимірного багатовиду.

Чепіженко Валерій Іванович. Доктор технічних наук. Старший науковий співробітник.

Кафедра аеронавігаційних систем, Національний авіаційний університет, Київ, Україна.

Освіта: Київське вище військово-авіаційне інженерне училище. Київ, Україна, (1990); ад'юнктура Київського інституту Військово-Повітряних Сил України. (1999).

Напрямок наукової діяльності: кібернетика, авіоніка, інформаційні технології і управління в ергатичних і технічних системах, керування складними динамічними системами конфліктного типу..

Публікації: 59.

E-mail: chiv@nau.edu.ua

Терещенко Лідія Юріївна. Асистент.

Кафедра авіаційних радіоелектронних комплексів, Національний авіаційний університет, Київ, Україна.

Освіта: Київський міжнародний університет цивільної авіації, Київ, Україна, (1999 р.).

Напрямок наукової діяльності: доглядові системи, обробка зображень, проекційна геометрія, радіоелектронні системи.

Публікації: 7.

E-mail: 10118@ukr.net

В. И. Чепиженко, Л. Ю. Терещенко. Метод оптического изображения внутренней структуры трехмерного многообразия

Рассмотрены аналитические модели получения оптического изображения внутренней структуры объектов контроля и на их основе проанализированы искажения, которые приобретают изображения в зависимости от параметров системы визуализации и типа источников излучения. Метод, разработанный для оптического изображения внутренней структуры трехмерного многообразия (далее «контролируемый объект»), позволяет получить тени трехмерного многообразия.

Ключевые слова: рентген; служба авиационной безопасности; оптическое изображение; тень трехмерного многообразия.

Чепиженко Валерий Иванович. Доктор технических наук. Старший научный сотрудник.

Кафедра аэронавигационных систем, Национальный авиационный университет, Киев, Украина.

Образование: Киевское высшее военное авиационное инженерное училище. Киев, Украина, (1990); адъюнктура Киевского института Военно-Воздушных Сил Украины, (1999).

Направление научной деятельности: кибернетика, авионика, информационные технологии и управление в эргатической и технических системах, управление сложными динамическими системами конфликтного типа .

Публикации: 59.

E-mail: chiv@nau.edu.ua

Терещенко Лидия Юрьевна. Ассистент.

Кафедра авиационных радиоэлектронных комплексов, Национальный авиационный университет, Киев, Украина.

Образование: Киевский международный университет гражданской авиации, Киев, Украина, (1999 г.).

Направление научной деятельности: досмотровые системы, обработка изображений, проекционная геометрия, радиоэлектронные системы.

Публикации: 7.

E-mail: 10118@ukr.net