






• • • , • • • ” • • •
« »
65%.
(
)
:
[1-3],
,
,
,
,
,
()
,
[4],
: K, M S.
50 – 60
K
C₄A₃S (4CaO.3Al₂O₃.SO₃),
M
S
C₃A [5].
[4]:



() ,

[6],

8 50%
(. 1).

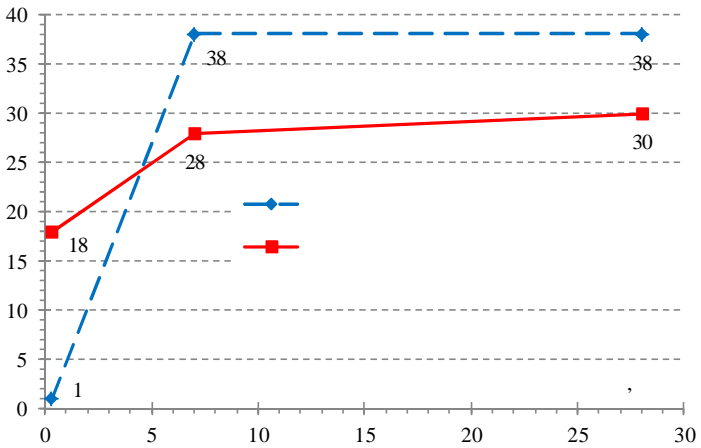

.1.

[6]

()

[2]


[1]

() .

2 :

[3],

(. 2).

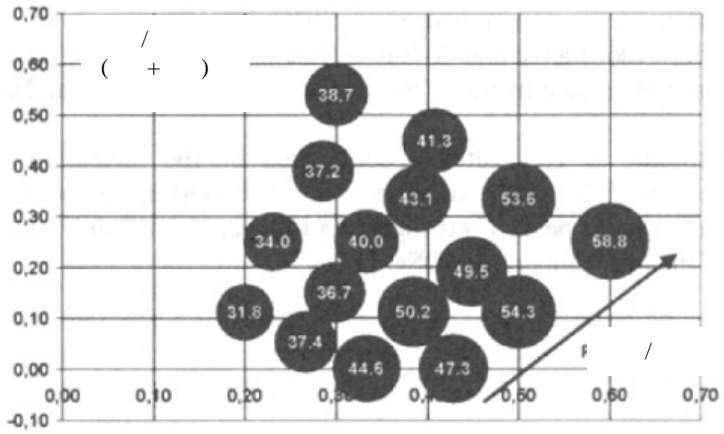

. 2.

[3]


40 % / 60 % 40.

(%)

8

1

50%

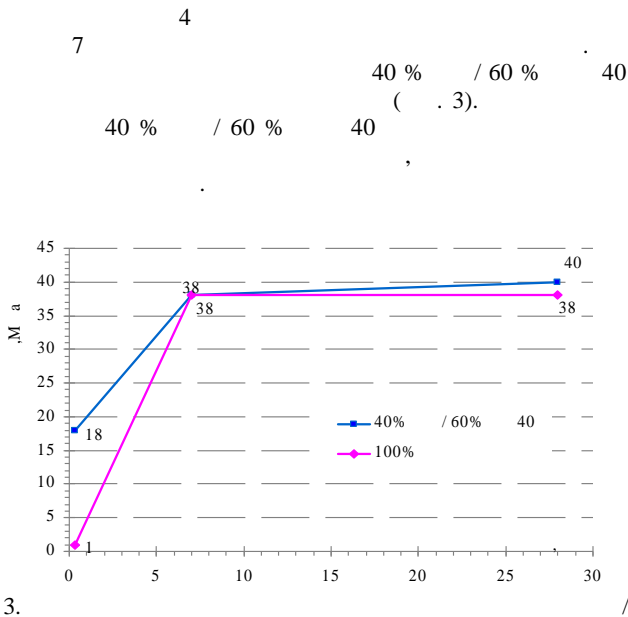

1. Kighelman J. Hydratation and structure development of ternary binder system as used in self-leveling compounds. Th se. Ecole polytechnique f d rale de Lausanne, Suisse, 2007. – 201 p.
2. Lamberet, S. Durability of ternary binders based on portland cement, calcium aluminate cement and calcium sulfate. Th se: Ecole Polytechnique F d rale de Lausanne, EPFL, 2005. – 212 p.
3. Amathieu L., Estienne F. Impact of the conditions of ettringite formation on the performance of products based on CAC+CS+OPC. Proceeding 15. ibausil, Weimar 2003. – 11 p.
4. Waldemar A. Klemm. Ettringite and Oxyanion-Substituted Ettringites – Their characterization and applications in the fixation of heavy metals: a synthesis of the literature. Portland Cement Association, 1998. – 68 p.
5. ASTM C 845, Standard Specification for Expansive Hydraulic Cement.
6. Michel M. Accélération des CEM par des liants ettringitiques. Rapport interne INSA Lyon. 2009.– 38 p.